


DIP Switch Setting for DW-10 890477-001

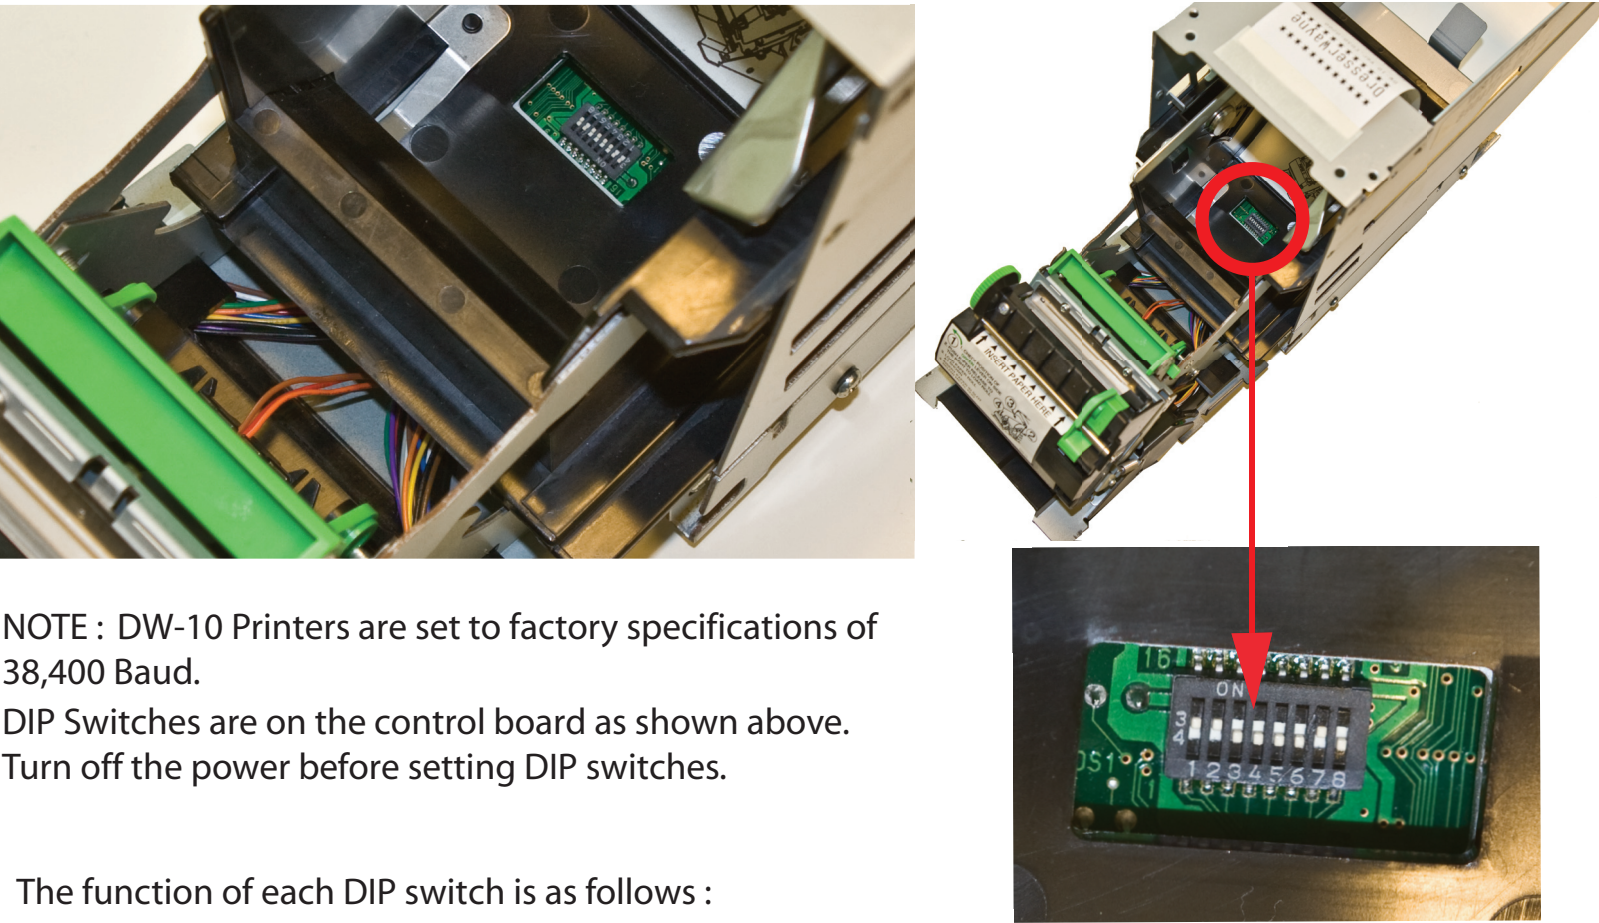

NOTE : DW-10 Printers are set to factory specifications of 38,400 Baud.

DIP Switches are on the control board as shown above.
Turn off the power before setting DIP switches.

The function of each DIP switch is as follows :

Switch No.	Function	ON	OFF	Initial Settings
1	Auto Cut	Enabled	Disabled	ON
2	Hand Shake	XON/XOFF	DTR/DSR	ON
3	Bit Length	7 Bits	8 bits	OFF
4	Parity Check	With Parity	None	OFF
5	Parity Selection	Even Parity	Odd Parity	OFF
6	Baud Rate Selection	See Table Below		OFF
7				ON
8	Print Density Selection	Dark	Standard	OFF

Baud Rate Selection		
Baud Rate (bps)	Switch Number	
	6	7
9600	OFF	OFF
19200	ON	OFF
38400	OFF	ON
115200	ON	ON

Tronitec, Inc. repairs, refurbishes and resells equipment made by the original equipment manufacturers. Tronitec, Inc. is not associated with, affiliated with, related to, authorized by, nor certified by referenced companies. Manufacturers names, product names and part numbers are for reference and identification only. All product names and company logos are the trademarks of their respective owners.