

 Power Down the TM-U950 printer prior to opening the printer cover, changing paper or performing maintenance.




 Carefully remove the printer ribbon before changing paper or repairing a paper jam.



 When installing a new paper roll, always cut approximately 1 foot of paper from the leading edge of the paper.



Loosen the set screw and carefully remove the coin cover when cleaning the printer or repairing a paper jam.

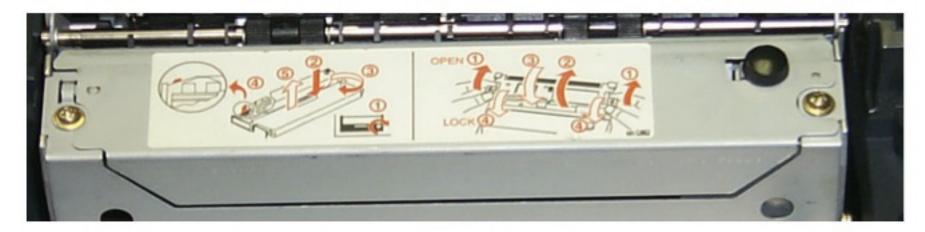




 Gently slide the print head to the side furthest from the paper printing path with a paper jam.




 Grab your handy paper jam remover to clear a paper jam.



 Gently insert the handy paper jam remover to clear a paper jam.

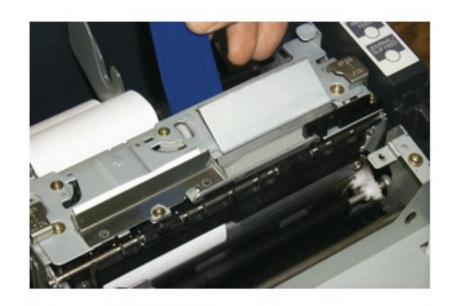


Gently slide your handy paper jam remover through the paper route. Be careful not to force the handy paper jam remover as it will damage the delicate paper press plate.

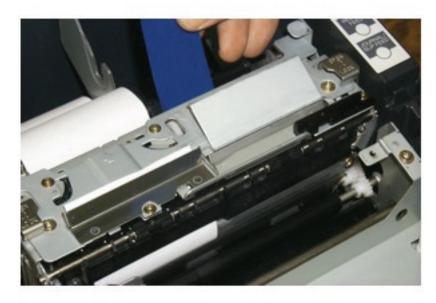






 Grab loose pieces of stray paper with a set of plastic tweezers.
Use a can of compressed air to blow dust and debris away from the printing route.

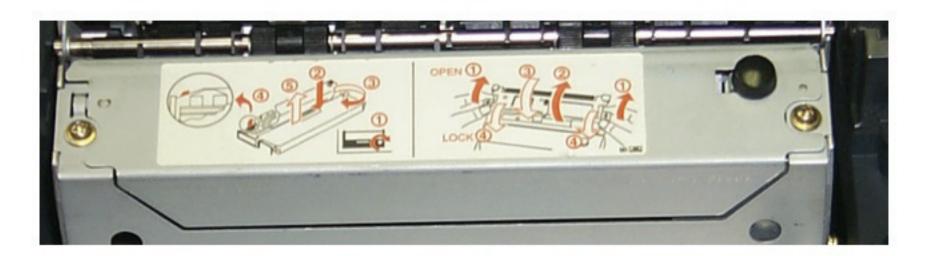

## Proper Coin Cover Installation

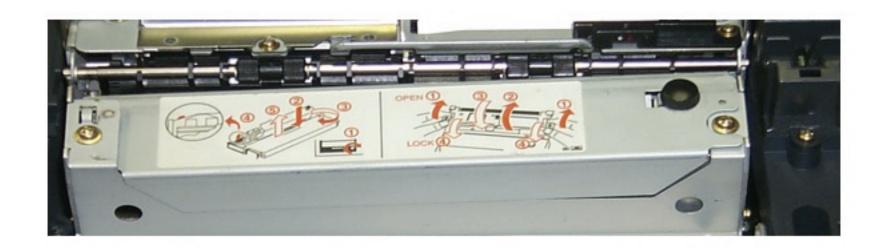

## Improper Coin Cover Installation