


**DS9208 BARCODE SCANNER CONFIGURATION FOR VERIFONE RUBY CONSOLE**

Scan the following bar codes in the order listed to configure the DS9208 scanner for Verifone Ruby. The Verifone Ruby console scanner port (PORT 8) **must be set at** 9600 baud rate for model DS9208.

**1****\*Set Defaults****2****RTS/CTS Option 3****3****Convert UPC-E to UPC-A (Enable)  
(01h)**

4

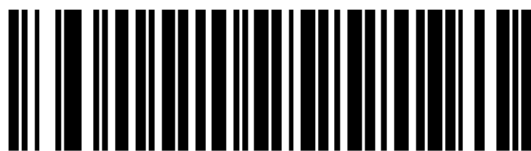

Symbol Code ID Character  
(02h)

5



<DATA> <SUFFIX 1>  
(01h)

6



Scan Suffix 1  
(06h)



Tronitec, Inc. repairs, refurbishes, and resells equipment made by the original equipment manufacturers. Tronitec, Inc. is not associated with, affiliated with, related to, authorized by, nor certified by referenced companies. Manufacturers names, product names and part numbers are for reference and identification purposes only. All product names and company logos are the trademarks of their respective owners.